













SUPER MINI POWER BANK

# 27000mAh PD3.1 Power QC4+

**PD140W** 

Model: TL180

Capacity: 27000mAh

Port: USB-C\*4

Weight: 630g



















Smartphone

Tablet

Laptop

Console

SUPER MINI POWER BANK Qi2 WIRELESS CHARGING

10000mAh

PD3.0 Power QC4+

PD35W

Model: TL177

Capacity: 10000mAh

Port: USB-C\*2

Dimension: 101.8\*64.5\*(18mm)

19.8mm /Weight: 210g

- Will, Lice Bhit ED Into dot to new the impaning pewel symbol of Charging with capacity of cow
- blockinggs 3. hybr 1. VEB-C I PDG/QC bV/sv. 9V/sv. 15V/E-92A. (5V/2-33A, 20V/1-75A359W miss)
- # DUIDUT LUBE CL FECUSC SVISA VV/SA 12V7,93A 15V7,03A 20V1 78A15W missly missly C Cool
- THET 3.3 LEVICA (SWI MICH)
  Cultura 2. USB C2 FDC/QC5 v/3A, 9V/3A, 12V/2/92A, 15V/2/3SA, XV/// 75A(35W mich Repotebrable USB C. Cool-
- Disputation (St. Mysikin 1984 und)
- s foral Power; (ISB,C) / TSE HDBSW (max
- 4 Suppost Agreement 193/P025/2C4,5-(30)000/ALC/2C (1) (10) 2/APPLIC 4
- E Supporting limit description (Cold France Futa)







iPhone 15 Pro Max
PD27W (MAX)



Replaceable USB-C Cable Support in/out PD35w

18<sub>mm</sub>

Thickness Only & Lightweight N52 Magnetic

Magnetic USB-C Port PD Docking Fast Charging

35w

215w Max.Wireless Charging











olet Lap

Console

### 10000mAh

PD3.0 Power QC4+

PD35W

Model: TL179

Capacity: 10000mAh

Port: USB-C\*2

Dimension: 101.8\*64.5\*18mm

Weight: 190g

Figals: nowing with diginal color
 With Case Dat LSD Indicator for how the remaining power, rymbol of Cherging and coposity of power

T. HIGH F USB CHT PDQ (QC 5V/3A, FVAIA, 12V)2,V2A, (1V)2,I3A, ZV/A, (5A)35W (Hzs.)

Imput 2 USB-C3 PDO/OC 5V/3A - 0V/3A - 12V/3-72A 15V/3-33A - 20V/1-73A (25W midy)Replacement this E.C. min A. Curput (1956-C) FDO/OC 5V/3A - 9V/3A - 12V/2-92A (5V/2-33A - 20V/1-75A (50W mixy)

7FT 3.3-1 (V/M (33W mits))
Culti-li 2 V/8 C2 FDC/3C 5V/3A, 9V/3A 12V/2.92A 15V/2.33A, 20V/1.76A(35W max)Replaceable US8 C Cable

TOTAL POWER USB CT J CZ FR35W (mm)

s Support Agreement (EPS/PDI 0/QC4 0+/1.0/5.0/AEC/XCP/Y/CF//ICE 1.2/AFS/U.2.4

J. Smillermoods Chings 9 devices (Total Power Ival











SUPER MINI POWER BANK WIRELESS CHARGING

10000mAh

PD3.0 Power Delivery QC4+

PD35W

Model: TL166

Capacity: 10000mAh



Fast Charge Indicator LED Display

Wireless charging Indicator

**Simultaneously Charge** devices (Total Power 30W)



iPhone 15 Pro Max PD27W(MAX)

15w Max.Wireless Charging

17<sub>mm</sub> Thickness Only & Lightweight

**N52** Magnetic Docking

35w **USB-C Port PD Fast Charging** 

Type C Cable in/out PD35w











SUPER MINI POWER BANK WIRELESS CHARGING

20000mAh

PD3.0 Power Delivery QC4+

#### PD45W

Capacity: 20000mAh

MSDS China



Wireless charging Indicator









iPhone 15 Pro Max PD27W(MAX)

Max.Wireless

30.5<sub>mm</sub> Thickness Only & Lightweight N52 Magnetic Docking

45w **USB-C Port PD** Fast Chargina

Type C Cable in/out PD45w















Smartphone Laptop

10000mAh

PD3.0 Bellivery QC4+ PD35W

Model: TL155

Capacity: 10000mAh

Port: USB-C\*2 USB-A\*1

Dimension: 98\*68\*17.8mm

Weight: 180g

2. With 188 LED Display to show the remaining power.

3. Input 1: USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/2.92A,15V/2.33A, 20V/1.75A(35W max) Input 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/2.92A,15V/2.33A, 20V/1.75A(35W max)

Output 1:USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/2,92A, 15V/2,33A, 20V/1.75A (35W max)
 \*PPS\* 3.3-11V/3A (33W max)

Output 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/2.92A,15V/2.33A, 20V/1.75A(35W max) \*PPS\* 3.3-11V/3A (33W max)

Output 3: USB-A QC 5V/3A, 9V/2.5A, 12V/1.5A (22.5W max)
5. Total Power: USB-C1 / C2 PD35W max
6. Support Agreement : PPS/PD3.0/QC4.0+/3.0/2.0/AFC/SCP/FCP/BC1.2/APPLE2.4

7. Simultaneously Charge 3 devices .(Total Power 5v6A)

\*1. USB-C1 + USB-C2 = (5V6A=30W max)

\*2. USB-C1 + USB-A =(5V6A=30W max)
\*3. USB-C + USB-A =(5V6A=30W max)

\*4. USB-C + USB-C2+USB-A = (5V6A=30W max)

8. Supporting input and output in .(Total Power 5v6A)



Macbook Pro M2 PD35W PD27W(MAX)



power

















SUPER MINI POWER BANK

PD3.0 Polivery QC4+

#### PD45W/70W

Model: TL156(45W) 330g

TL156Plus(70W) 340g

Capacity: 20000mAh Port: USB-C\*2 USB-A\*1

Dimension: 94\*68\*31.5mmm

- 2. With 188 LED Display to show the remaining power.
- 3. Input 1: USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.5A[70W max] Input 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.5A[70W max]
- 4. Output 1:USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.5A(70W max)

Output 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.5A(70W max) \*PPS\* 3.3-11V/6A (66W max)

- Output 3: USB-A QC 5V/3A, 9V/2A, 12V/1.5A (22.5W max)
- 5. Total Power: USB-C1 + C2 70W (max)
- Support Agreement :PPS/PD3.0/QC4.0+/3.0/2.0/AFC/SCP/FCP/BC1.2/APPLE2.4
- 7. Dual USB-C ports independently support fast charge. Simultaneously Charge 3 devices.
- 8. Simultaneously Charge:
- (2) USB-C1 / C2 Can be divided the power into two level smartly.
- 1.(20V) USB-C1 45W + (9V) USB-C2 20W =Total:65W max
- \*2.(20V) USB-C1 35W + (20V) USB-C2 35W =Total:70W max
- \*3.(20V) USB-C1 45W + (9V) USB-A 22.5W =Total:67.5W max
- \*4.USB-C1 45W + (USB-C2 + USB-A) 15W =Total: 60W max
- \*5.USB-C2 +USB-A =Total:(5V6A=30W max)
- Supporting input and output in fast mode at the same time



Macbook Pro M2 PD70W(MAX) iPhone 15 Pro Max PD27W(MAX)























25000mAh

PD3.0 Power QC4+

PD67W

Model: TL129(67W) Capacity: 25000mAh

Port: USB-C\*2 USB-A\*1

Dimension: 99.5\*68\*32.5mm

Weight: 386g

1. Plastic housing with leather
2. With 188 LED Display to show the remaining power.
3. Input 1: USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A(67W max) Input 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A(67W max)
4. Output 1: USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A(67W max)

\*PPS\* 3.3-11V/6A (66W max)

Output 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A(67W max)

\*PPS\* 3.3-11V/6A (66W max)

Output 3: USB-A QC 5V/3A, 9V/2A, 12V/1-5A (22.5W max)

5. Total PowerUSB-C1 + C2 67W (max)

- olpuls, 3,5554 ac 3,757,47,742, 1271,534 (2234 1104) tal PowerUSB-C1 + C2 6,77W (max) pport Agreement :PPS/PD3.0/GC4.0+/3.0/2.0/AFC/SCP/FCP/BC1.2/APPLE2.4 val USB-C ports independently support fast charge.Simultaneously Charge

- 8. Sminthreous Totalga.
  (2) USB-C1 / C2 =67W max
  (2) USB-C1 / C2 Can be divided the power into two level smortly.
  \*1.(20V) USB-C1 45W + (9V) USB-C2 20W =Total;65W max
  \*2.(20V) USB-C1 30W + (20V) USB-C2 30W =Total;67W max

- \*3,(20Y) USB-C1 45W + (9Y) USB-A 22.5W =Total:67.5W max \*4,USB-C1 45W + (USB-C2 + USB-A) 15W =Total:60W max 9. Supporting input and output in fast made at the same time.



Macbook Pro M2 PD67W(MAX) iPhone 15 Pro Max PD27W(MAX)

















SUPER MINI POWER BANK

PD3.0 Power QC4+

### **PD100W**

Model: TL92PLUS

Capacity: 20000mAh

Dimension: 144\*68\*26.5mm Weight: 370g



Macbook Pro 16°

PPS45W

PD27W



Display to show















SUPER MINI POWER BANK

PD3.0 Power QC4+

### PD100W

Model: TL100PLUS

Capacity: 20000mAh Port: USB-C\*2 USB-A\*1

Dimension: 130X77x26mm

Weight: 365g

- Plastic housing with original color & Aluminumm Coating, Matt UV looking
  2. With 188 LED Display to show the remaining power.
  3. Input 1: USB-C1 PDO/QC 5V/3A, 7V/3A, 12V/3A, 15V/A, 20V/5A(100W max) Input 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/A, 20V/5A(100W max) 4, Output 1: USB-C1 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/A, 20V/5A(100W max) 9PS\*3, 3-16 AV/6A (66W max)
  Output 2: USB-C2 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/A, 20V/5A(100W max) 9PS\*3, 3-16 AV/6A (66W max)
  Output 2: USB-C3 PDO/QC 5V/3A, 9V/3A, 12V/3A, 15V/A, 20V/5A(100W max) 5-10 AV/6A (66W max)
  Output 3: USB-A QC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A(100W max) 7PS\*3, 3-16 AV/6A (66W max)
  Output 3: USB-A QC 5V/3A, 9V/3A, 12V/3A, 12V/3A, 15V/A, 20V/5A(100W max)
  5. Total PowerUSB-C1/C2 PD100W (max)
  7. Duol USB-C ports independently support fast charge, Simultaneously Charge 3 devices.
  8 Simultaneously Charge 3

- 1) USB-C1 / C2 = 100W max.
  2) USB-C1 / C2 = 00W max.
  1 (20V) USB-C1 / C2 Can be givided the power into two level smarthy.
  1 (20V) USB-C1 / C2 65W + (9V) USB-C1 / C2 30W = 1otal;95W max.
  2 (20V) USB-C1 / C2 45W + (20V) USB-C1 / C2 45W = 1otal;95W max.
  3 (20V) USB-C1 65W + (9V) USB-A 72.5W = 1otal;87.5W max.
  4 USB-C1 55W+(USB A-USB C2 5V3A=15V) = 1otal;80W max.
  5 USB-C2 + USB-A = [Total Power 5V6A max]

















SUPER MINI POWER BANK

PD3.0 Power QC4+

#### **PD45W**

Model: TL18PLUS

Capacity: 10000mAh

Port: USB-C\*1 USB-A\*1

Dimension: 92x64x23mm

Weight: 195g

















### 10000mAh


PD3.0 Power QC4+

#### PD45W

Model: TL16PLUS

























SUPER MINI POWER BANK WIRELESS CHARGING

8000mAh

PD3.0 POWER QC4+

PD20W

Model: TL138

Capacity: 8000mAh Port: USB-C\*1 USB-A\*1

Wireless (5/7.5/10/15W max)

Dimension: 89.5\*63\*16.5mm

Weight: 190g

ultarreausy Charge 3 devices (Total Power 5v3A) parting input and output in (Total Power 5v3A)













Lapto

Console

### 10000mAh

 $PD3.0 \stackrel{\tiny Power}{\tiny Delivery} \quad QC4 +$ 

#### **PD30W**

Model: TL97

Capacity: 10000mAh Port: USB-C\*1 USB-A\*1

Dimension: 77x56x26mm


Weiaht: 175a

- 1. Plantic housing With original color & Aluminumin Spating, Matt UV looking.
- L WITH 188 LED Display to show the remaining power.
- 3. Input 1. 888-C PD/QC 5V/3A, 9V/2,22A, 12V/1,5A(20W max) Output 1. 888-C FEGICEV/3A, 9V/3A, 12V/2,5A, 13V/2A(80W max)
- \*PPS/QC4+ 3:3-5V/3A/18W max) of 3:2-11V/34(33W max)
  Output 2: USA A GC/CT 4 5:5V/5A 5V/3A 9V/3A 12V/2:54(3W max)
  3: Table Bender PRS 93W BRIGHT (February)
- s Support Agreement FPS/FB3.0/QC4.0+/8.0/2.0/SCF/FCF/VOCC
- S-VOOC/ AFC/MI CHARGE TURBO/MI SOC/1+ E/ASH/1+ WARP/AFILED &
- 7 Limutaneously Charge 2 devices Tatal Power: ISW/hV Imax
- B Support charging and due harging at the same time























blet L

C

Console

10000mAh

PD3.0 Power QC4+

**PD30W** 

Model: TL95

Capacity: 10000mAh Port: USB-C\*1 USB-A\*1 Dimension: 77x56x26mm

Weight: 175g

I. Flastic nousing with original color & Aluminumm Coating, Matt UV looking

With 188 LED Display to show the remaining power.

3. Input 1: USB-C PDGPS//3A, PV/3224, 12V/15A/30W mbxl Output 1: USB-C PDGPS//3A, PV/3A, 12V/2.5A,15V/2A(30W mbxl) \*PPS/QC4+: 3.3-6V/3A(18W mbxl) or 3.3-11V/3A(33W mbxl) Output 2: USB-A QC/SCP 4.5-5V/5A, 5V/3A, 9V/3A, 12V/2.5A(3W mbxl) 5. Total Power, PBS 33W,PDS/30W limboxl.

- s Support Agreement PPS/PD3.0/QC4.0+/3.0/2.0/5CP/FCP/VQQC
- S-VOOCE AFC/MI CHARGETURBO/MI SQC/1+ DASH/1+ WARP/AFPLES
- A Support charging and chatasping at the same line

















Laptop

### 10000mAh

PD3.0 Power QC4+

**PD30W** 

Model: TL97

Capacity: 10000mAh Port: USB-C\*1 USB-A\*1

Dimension: 77x56x26mm

Weight: 175g

1. Plastic housing with sticking leather.
2. With 188 LED Display to show the remaining power.
3. Input 1: USB-C PD/QC SV/3A, 9V/2.22A, 12V/1.5A/20W max).
Output 1: USB-C PDGC SV/3A, 9V/3A, 12V/2.5A, 15V/2A(30W max).
\*PPS/QC4+: 3.3-6V/3A(18W max) or 3.3-11V/3A(33W max).
Output 2: USB-A QC/SCP 4.5-SV/5A, 5V/5A, 9V/3A, 12V/2.5A/3W max).
5. Total Power: PPS 33W/PD30W (max).
6. Support Agreement: PPS/PD30/QC4.0+/3.0/2.0/SCP/FCP/VOOC.
S-VOOC/AFC/MICHARCETURBO/MISQC/1+ DASH/1+ WARP/APPLE2.4
7. Simultaneously. Charge 2 devices/Total Power: 15W/SV/max.

MSDS ASSE



Support iPhone 15 Pro Max PD27W<sub>(MAX)</sub>





Smartphone







Laptop

#### SUPER MINI POWER BANK

### 10000mAh

PD3.0 Power Delivery QC4+

#### **PD30W**

Model: TL124

Capacity: 10000mAh Port: USB-C\*1 USB-A\*1

Dimension: 108x66.5x16mm


Weight: 190g

- 2. With 188 LED Display to show the remaining power.
- 3. Input 1: USB-C PD/QC 5V/3A, 9V/2.22A, 12V/1.5A(20W max) Input 2: Micro USB QC 5V/2A, 9V/2A, 12V/1.5A(18W max). Output 1; USB-C PDQC5V/3A, 9V/3A, 12V/2.5A, 15V/2A(30W max) \*PPS/QC4+: 3.3-6V/3A(18W max) or 3.3-11V/3A(33W max)
- Output 2: USB-A QC/SCP 4.5-5V/5A, 5V/3A, 9V/3A, 12V/2.5A(3W max) 5. Total Power: PPS 33W/PD30W (max)
- 6. Support Agreement :PPS/PD3.0/QC4.0+/3.0/2.0/SCP/FCP/VOOC S-VOOC/ AFC/MI CHARGE TURBO/MI SQC/1+ DASH/1+ WARP/APPLE2.4

7. Simultaneously Charge 2 devices(Total Power: 15W/5V)max 8. Support charging and discharging at the same time.







100%





























20000mAh

PD3.0 Power Delivery QC4+

#### PD65W

Model: TL47

Capacity: 20000mAh Port: USB-C\*1 USB-A\*2

Dimension: 132x67.5x25mm

Weight: 360g

- Support Agreement : PPS/PD3.0/QC4.0+/3.0/2.0/SCP/FCP/VOOC/S-VOOC/AFC/Mi\_CHARGE\_TURBO/1+ DASH/1+ WARP/BC1.2
   Simultaneously\_Charge\_3 devices[Total Power: 15W/5V max)
   Support charging and discharging at the same time.





Macbook Pro M2 PD65W(MAX) iPhone 15 Pro Max PD27W(MAX)













Laptop

Console

SUPER MINI POWER BANK

PD3.0 Power QC4+

**PD20W** 

Model: TL38

Capacity: 8000mAh Port: USB-C\*1 USB-A\*1

Dimension: 91.5x65x14.5mm

Weight: 140g

- 1. Plastic housing with mixed color & Shinning UV Coating
- 3. Input I: USB-C FD 5V/3A, 9V/2-22A, 12V/1 68A(20W mox)
- 4; Output 1; USB C PD/QC 5V/3A; 9V/2:22A; [ZV/1 68A[20W max] \*PPS/QC4+: 3:3-6V/3A[18W Max] or 3:3-11V/2A[22W max]
- 5. Total Power: PPS 22W/PD20W (misx)
- Support Agreement :PPS/PD3.0/QC4.0+/3.0/2.0/SCP/FCP/APPLE2.4/8C1.2
- Simultaneously Charge 2 devices (Total Power 15W/5V max
- 8 Support charging and discharging at the same time.













8000mAh

PD3.0 Power QC4+

PD20W

Model: TL39

Capacity: 8000mAh Port: USB-C\*1 USB-A\*1

Dimension: 91.5x65x14.5mm

Weight: 140g
















8000mA

PD3.0 Power QC4+

**PD20W** 

Model: TL40

Capacity: 8000mAh Port: USB-C\*1 USB-A\*1


Dimension: 91.5x65x14.5mm

Weight: 140g

- 1. Plastic housing with Shinning UV Coating
  2. With 4 LED Indictor to show the remaining power.
  3. Input 1: USB-C PD 5V/3A, 9V/2.22A, 12V/1.88A(20W max)
  Input 2: Micro USB QC 5V/2A, 9V/2.21, 12V/1.5A(18W max)
  4. Output 1: USB-C PD/QC 5V/3A, 9V/2.22A, 12V/1.68A(20W max)
  PPS/QC4+: 3.3-6V/3A(18W max) or 3.3-11V/2A(22W max)
  Output 2: USB-A QC/SCP 5V/3A, 9V/2.25A, 12V/1.5A(20W max)
  5. Total Power: PPS 22W/PD20W (max)
  6. Support Agreement .PPS/PD3.0/GC4.0+/3.0/2.0/SCP/FCP/APPLE2.4/BC1.2.

- 7. Simultaneously Charge 2 devices{Total Power: 15W/5V max} 8. Support charging and discharging at the same time.



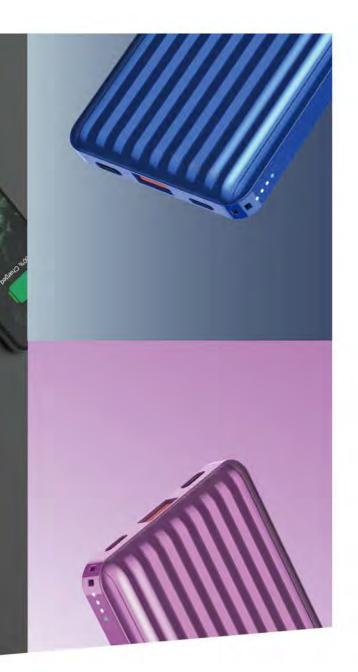









### 10000mAh

PD3.0 Power Delivery QC4+

### PD20W

Model: TL25

Capacity: 10000mAh Port: USB-C\*1 USB-A\*1

Weight: 177g

















Laptop

10000mAh

PD3.0 Power QC4+

PD20W

Model: TL25

Capacity: 10000mAh Port: USB-C\*1 USB-A\*1

Dimension: 116x68x13mm

Weight: 177g

- Plastic housing with Shinning UV Coatling
   With 188 LED Display to show the remaining power,
   Shink 188 LED Display to show the remaining power,
   Input 1: JUSS-CP D 5/3A, 9V/2.22A. 12V/1.86A(20W max)
   Input 2: Micro USB QC 5V/2A, 9V/2A, 12V/1.5A(18W max)
   Shink 1: USS-C PD/QC 5V/3A, 9V/2.22A. 12V/1.5A(20W max)
   PSPS/QC4+: 3.3-6V/3A(18W max) or 3.3-11V/2A(22W max)
   Output 2: USS-A QC/SCP 5V/3A, 9V/2.5A. 12V/1.5A(20W max)
   Should not prove PS 22W/PD20W (max)
   Should not prove PS 22W/PD20W (m

- 7. Simultaneously Charge 2 devices{Total Power: 15W/5V max} 8. Support charging and discharging at the same time.













Laptop

10000mAh

PD3.0 Power QC4+

PD20W

Model: TL16

Capacity: 10000mAh Port: USB-C\*1 USB-A\*2 Dimension: 92x64x23mm

Weight: 186.6g

- Plastic housing with Aluminumm Coating, Matt UV looking
   With 188 LED Display to show the remaining power.
   Input 1: USB-C PD SV/3A. 9Y/2.2A. 12Y/1.8A(120V max).
  Input 2: Micro USB QC 5V/2A. 9V/2A. 12Y/1.5A(18W max).
   USB-C PD/QC 5V/3A. 9Y/2.2A. 12Y/1.6A(120W max).
   PPS/QC4+: 3.5-V/3A(18W max) a.3-11V/2A(20W max).
   Output 2: USB-A1 QC/SCP 5V/3A. 9V/2.5A. 12Y/1.5A(20W max).
   Output 3: USB-A2 QC/SCP 5V/3A. 9V/2.5A. 12Y/1.5A(20W max).
   Start Power: PPS 22W/PD20W (max).
   Input 4: VSB-A2 QC/SCP 5V/3A. 9V/2.5A. 12Y/1.5A(20W max).
   Input 5: VSB-A2 QC/SCP 5V/3A. 9V/2.5A. 12Y/1.5A(20W max).
   Input 5: VSB-A2 QC/SCP 5V/3A. 9V/2.5A. 12Y/1.5A(20W max).

- 6. Support Agreement :PS/PD3.0/QC4.0+/3.0/2.0/SCP/FCP/APPLE2.4/BC1.2
  7. Simultaneously Charge 3 devices(Total Power; 15W/5V max)
  8. Support charging and discharging at the same time.





